



Bank Of Israel

Open Banking IL
Implementation Guidelines

Extended Services
AIS for Single Cards

נספח א'2 להוראת ניהול בנקאי תקין 368

תקף החל מכניסת תאגידים שאינם קטנים לתוקף.

Version 1.7

15 Nov 2023



**NextGenPSD2 XS2A Framework
Implementation Guidelines
Extended Services
AIS for Single Cards**

Version Darft 1.4

15 July 2021

License Notice

This Specification has been prepared by the Participants of the Joint Initiative pan-European PSD2-Interface Interoperability* (hereafter: Joint Initiative). This Specification is published by the Berlin Group under the following license conditions:

- "Creative Commons Attribution-NoDerivatives 4.0 International Public License"



This means that the Specification can be copied and redistributed in any medium or format for any purpose, even commercially, and when shared, that appropriate credit must be given, a link to the license must be provided, and indicated if changes were made. You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use. In addition, if you remix, transform, or build upon the Specification, you may not distribute the modified Specification.

- Implementation of certain elements of this Specification may require licenses under third party intellectual property rights, including without limitation, patent rights. The Berlin Group or any contributor to the Specification is not, and shall not be held responsible in any manner for identifying or failing to identify any or all such third party intellectual property rights.
- The Specification, including technical data, may be subject to export or import regulations in different countries. Any user of the Specification agrees to comply strictly with all such regulations and acknowledges that it has the responsibility to obtain licenses to export, re-export, or import (parts of) the Specification.

* The 'Joint Initiative pan-European PSD2-Interface Interoperability' brings together participants of the Berlin Group with additional European banks (ASPSPs), banking associations, payment associations, payment schemes and interbank processors.

Contents

1	Introduction.....	1
1.1	Background	1
1.2	XS2A Interface Specification	2
1.3	Document History	4
2	Character Sets and Notations.....	7
3	Transport Layer	7
4	Application Layer: Guiding Principles.....	8
4.1	API Access Methods	8
4.2	Card Specifics in Submission of Consents	10
4.3	Additional Error Information	15
4.4	Status Information	15
5	New Message types	16
5.1	Read Card List	16
	Request.....	16
	Response	17
	Examples	17
5.2	Read Card Details	20
	Request.....	20
	Response	21
	Example 1 (standard card)	21
	Example 2 (multicurrency card with balances).....	23
5.3	Read Card Balances	25
	Request.....	25
	Response	28
	Examples	29
5.4	Read Card Transaction List	32
	Request.....	32
	Response	36
	Example	37
6	Extension of Complex Data Types.....	41
6.1	Links.....	41

6.2	Account Access.....	41
6.3	Account Reference.....	45
6.4	Card Account Details.....	47
6.5	Balance Type	51
6.6	Example: calculation of balance types.....	53
7	References.....	55



1 Introduction


1.1 Background

With [PSD2] the European Union has published a new directive on payment services in the internal market. Member States had to adopt this directive into their national law until 13th of January 2018.

Among others [PSD2] contains regulations of new services to be operated by so called Third Party Payment Service Providers (TPP) on behalf of a Payment Service User (PSU). These new services are

- Payment Initiation Service (PIS) to be operated by a Payment Initiation Service Provider (PISP) TPP as defined by article 66 of [PSD2],
- Account Information Service (AIS) to be operated by an Account Information Service Provider (AISP) TPP as defined by article 67 of [PSD2], and
- Confirmation of the Availability of Funds service to be used by Payment Instrument Issuing Service Provider (PIISP) TPP as defined by article 65 of [PSD2].

For operating the new services a TPP needs to access the account of the PSU which is usually managed by another PSP called the Account Servicing Payment Service Provider (ASPSP). As shown in the following figure, an ASPSP has to provide an interface (called "PSD2 compliant Access to Account Interface" or short "XS2A Interface") to its systems to be used by a TPP for necessary accesses regulated by [PSD2]:

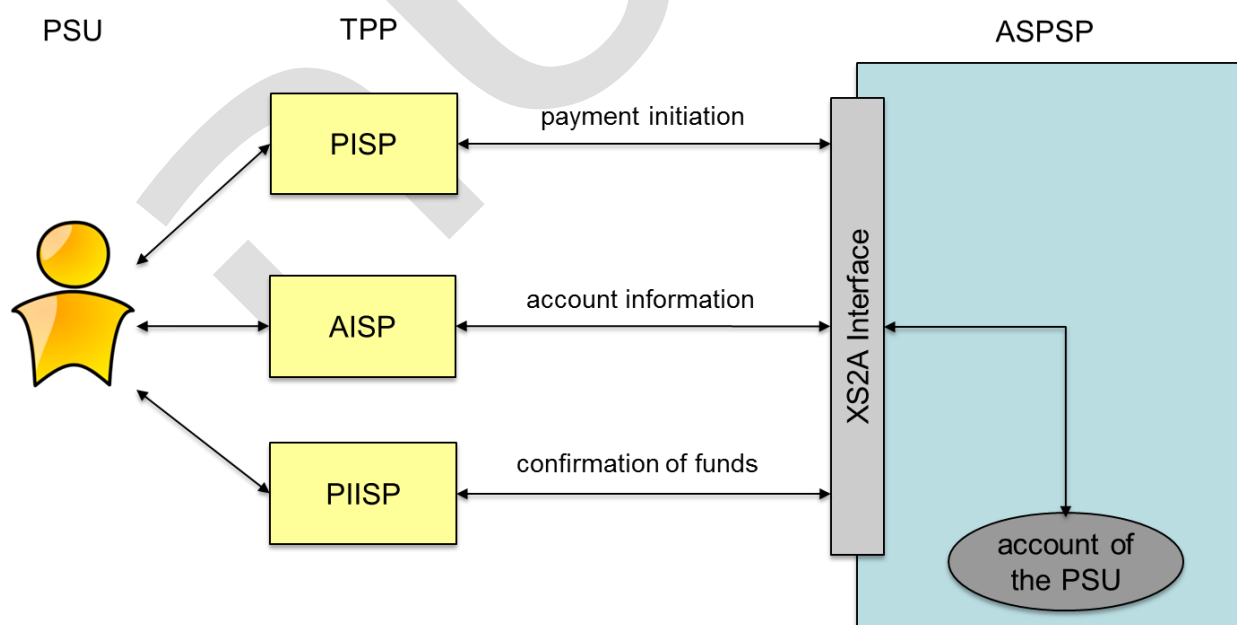

Further requirements on the implementation and usage of this interface are defined by a Regulatory Technical Standard (short RTS) from the European Banking Authority (short EBA), published in the Official Journal of the European Commission.

Specifically, the Account Information Service offers the possibility for a TPP to request Information of so-called "card-accounts", i.e. accounts that are used to reconcile credit card transactions with the PSU. Currently, a card account does not provide further possibility of distinction. If, for example, a card account is identified by a leading PAN P_1 but also covers a secondary PAN P_2 , then all requests for information on this card account will always contain information on P_1 and P_2 . In some cases information provided for one card-account cannot be assigned to one specific PAN by the TPP and / or PSU.

Also, current global consent models cannot be used to restrict access to only accounts of one type (e.g. card-accounts). In addition, the bank offered consent model does currently not support a restriction of the consent request to a type of accounts. That is, if a PSU wants to grant a TPP access to all of his card-accounts he might end up granting the TPP access to all of his accounts instead.

These two points will be addressed in the following extension of the AIS protocol. For this aim, the term "multi card-account" will be introduced to describe card accounts that might cover more than one PAN. Complementary, a "single card account" will be the term used for a card account covering only one PAN. Note that even a single card account may represent more than one card, e.g. an old physical card and its renewal generally are identified via the same PAN and therefore would be covered by the same single card account.

To achieve this two downward compatible changes will be made to the protocol:

1. The response to a request for a card account list will be extended such that an ASPSP can provide single card accounts or multi card accounts and also mark single card accounts distinguishable from multi card accounts.
2. The request for a consent will be adjusted such that a TPP can specifically request access to only one accountType (e.g. card accounts).


1.2 XS2A Interface Specification

This document is an extension of the NextGenPSD2 XS2A Specification which defines a standard for an XS2A Interface and by this reaching interoperability of the interfaces of ASPSPs at least for the core services defined by [PSD2].

The XS2A Interface is designed as a B2B interface between a TPP server and the ASPSP server. For the time being, the protocol defined in this document is a pure client-server protocol, assuming the TPP server being the client, i.e. all API calls are initiated by the TPP. In future steps, this protocol might be extended to a server-server protocol, where also the ASPSP initiates API calls towards the TPP.

The Interoperability Framework defines operational rules, requirements on the data model and a process description in [XS2A-OR].

This document details the standard in defining messages and detailed data structures for **extended services** of the XS2A Interface. For the specification the two layers shown in the following figure are distinguished:

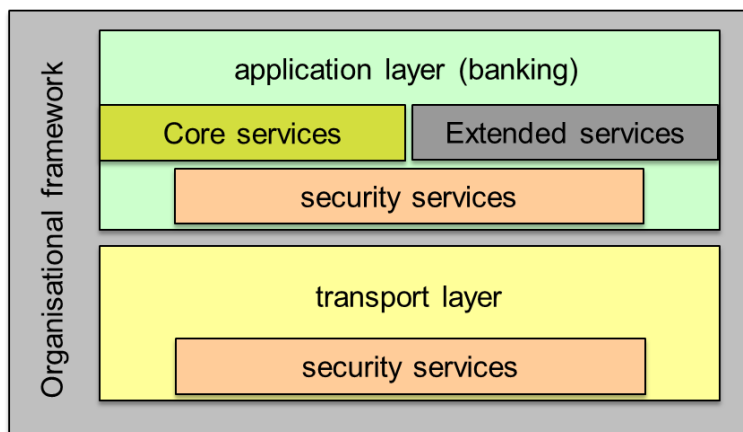

This document now describes how the existing services for account information can be extended to specifically grant consent only on card accounts and to specifically provide account information on card accounts on the level of single cards, i.e. of PANs.

Remark for Future: Please note that the Berlin Group NextGenPSD2 XS2A interface is still under constant development. Technical issues, which are already in discussion within the Berlin Group NextGenPSD2 working structure are mentioned in this document by "Remark for Future" to make the reader aware of upcoming potential changes.

1.3 Document History

Version	Change/Note	Approved
1.0	First Version published, integrating market consultation feedback	14 July 2020 by NextGenPSD2 Task Force
1.1	<p>Added a remark on different balance semantics for /cards and /card-accounts at the beginning of Section 4.</p> <p>Added closingBooked balance for reporting monthly volumes with the related semantic regarding an account period with the following change effects:</p> <ul style="list-style-type: none"> Added a query parameter dateFrom in Section 5.3 for Read Card Balance Call and the related changes in the access method description in Section 4.1 Corrected and added examples in Section 5.3 for Read Card Balance Call. Added remarks in the description of closingBooked and interimBooked Balance Types in Section 6.5 <p>Corrected example in Section 5.4 regarding the X-Request-ID in the http header.</p> <p>Deleted the reference to the proprietary code "CARD" for the account reference sub attribute cashAccountType in Section 6.3, since CARD is now a code in the ISO20020 external code lists.</p> <p>Adapted all examples to a revert order between balanceAmount and balanceType</p> <p>Corrected example for interimAvailale balance and added an example for closingBooked balance.in Section 6.6</p>	30 October 2020 by NextGenPSD2 TaskForce
1.2	A note was added in Section 4.2 to clarify that the additionalInformation attribute can also be used for cards to retrieve the card owner name	openFinance TaskForce 14 Dec 2020

Version	Change/Note	Approved
	<p>if supported by the ASPSP. The related attribute was added in Section 6.2.</p> <p>A new flag debitAccounting has been added to card account details, card balances and card transaction responses to indicate whether debited card transactions are quoted positively or not in reports and balances. This change applies to Section 5.2, 5.3, 5.4 as well as 6.4 and 6.6. The transaction amount and balance amount signs have been adapted in all examples where applicable.</p> <p>An example on balance types for prepaid cards have been added in Section 6.6.</p>	
1.3	<p>Included optional "debitAccounting" indicators for balances and transactions Response.</p> <p>Format extension of "details" elements in accordance with the basic Implementation Guidelines.</p> <p>Added reference to a new errata on core XS2A Implementation Guidelines, which introduce new attributes for the card transaction report for instalment payment and the date of invoicing.</p>	openFinance Taskforce 30 June 2021
1.4 Draft	First approach to also include Changes from CR-75 (additional query Parameter "valueDateFrom")	

BOI Remark:

Document history for the Israeli market:

Version	Change/Note	Approved
1.0	First Version published, integrating market consultation feedback	01 October 2020 by NextGenPSD2 Task Force and BOI.

Version	Change/Note	Approved
1.0.1	BOI Remarks have been added.	27 January 2021 by BOI.
1.0.2	BOI Remarks have been added based on version 1.2	11 May 2021
1.4.0	BOI Remarks have been added based on version 1.4. This is the final version for the Israeli market.	24 Aug 2021
1.4.1	Fix examples with debitAccounting	13 Feb 2022
1.5	BOI Remarks have been added based on IG 1.3.11	4 April 2022
1.6	Support for small corporate. No change.	6 Dec 2022
1.7	BOI Remarks have been added.	9 Jan 2023

2 Character Sets and Notations

For definition on character Sets and Notations as well as for request and response notations refer to Chapter 2 of [XS2A-IG].

3 Transport Layer

For details on the transport Layer, please refer to Chapter 3 in [XS2A-IG].

4 Application Layer: Guiding Principles

The following extension will define requests for a TPP to get information on one single card. However, in this context "single card" does not necessary refer to only one physical card. Specifically, if a card is renewed and its successor does have the same PAN as the first card, both of them will treated as one single card. There is (intentionally) no method to distinguish the two.

To specifically request information on one single card, a new "/cards" endpoint is defined. Access to the "/cards" endpoint works most regards analogously to access to a card-accounts endpoint with the exception, that the "/card" endpoint provides information on one single card instead of a card account, that might consist of more than one card. In addition, the /cards endpoint will deliver also information about monthly volumes of cards.

An important difference between the /card-accounts and the /cards endpoint is the underlying semantics of the balance type. The balance for /card-accounts does not involve entries which are pending between card schemes and the ASPSP because it is the sole view of the card reconciliation account and has no view on the dedicated credit card processing system. The /cards endpoint takes all pending transactions into account. Signing Messages at Application Layer

The ASPSP may require the TPP to sign request messages. This requirement shall be stated in the ASPSP documentation. The signing requirements are defined in [XS2A-IG]. No specific requirements are defined for the Account Information Services on Single Cards.

4.1 API Access Methods

The following table gives an overview on the HTTP access methods supported by the new API endpoint and by resources created through this API.

Endpoints/Resources	Method	Condition	Description
cards	GET	Optional BOI remarks: Mandatory	Read all identifiers of the card (usually a credit card), to which an access has been granted to through the /consents endpoint by the PSU. In addition, relevant information about the cards and hyperlinks to corresponding card information resources are provided if a related consent has been already granted. Section 5.1
cards/{card-id}	GET	Mandatory	Read detailed information about the addressed card.

Endpoints/Resources	Method	Condition	Description
			Section 5.2
cards/{card-id}/balances[?dateFrom]	GET	Mandatory	Read detailed balance information about the addressed card. For a given card, an optional parameter "dateFrom" defines the begin of a period from which to obtain available balance related information. Section 5.3
cards/{card-id}/transactions	GET	Mandatory	Read transaction reports or transaction lists related to a given card. For a given card, additional parameters are e.g. the attributes "dateFrom" and "dateTo". Section 5.4

BOI remarks:

The next table summarises the security profile of cards endpoints that the ASPSP must implement.

Any empty value means that the TPP can act without the relevant component

(consent status== valid / access token).

Endpoints security profile summary:

Endpoint	Method	condition	certificate role	consent status == valid	access token
cards	GET	Mandatory	PSP_AI/PSP_AS	Mandatory	Mandatory
cards/{card-id}	GET	Mandatory	PSP_AI/PSP_AS	Mandatory	Mandatory
cards/{card-id}/balances/[?dateFrom]	GET	Mandatory	PSP_AI/PSP_AS	Mandatory	Mandatory
cards/{card-id}/transactions	GET	Mandatory	PSP_AI/PSP_AS	Mandatory	Mandatory

4.2 Card Specifics in Submission of Consents

As before, specific card reconciliation accounts (called “card accounts” in [XS2A-IG]) can be addressed in a consent request by identifying the card account by its corresponding masked PAN. Please note that the card accounts are providing card information in an accumulated way.

In addition, this specification adds to this consent model, that a masked PAN is addressing a single card.

It is up to the ASPSP if this consent grants access

- to the single card identified by the masked PAN,
- the card account identified by the masked PAN or
- both,

delivering these information on the related endpoints /card-accounts or /cards. The ASPSP's respective decision must be documented by the ASPSP.

Additionally, a card account or single cards can be addressed by an Account Access Object containing an identifier of the reconciliation account accompanied by the specification of the cashAccountType to Type "CARD" (see Section 6.3). A consent of this type will grant the respective access to both,

- all cards reconciled through this account and
- the related card account,

if the ASPSP supports the corresponding endpoints at all.

BOI Remarks:

A consent to an account is grant to all current and future single cards which are reconciled through this account.

As a third / fourth way to establish a card specific consent, the TPP can request a bank-offered consent or a global consent but restricting the requested access to a certain cashAccountType – e.g. CARD. A consent of this type will grant the respective access to both

- cards and
- card accounts,

if the ASPSP supports the related endpoints at all.

NOTE: The usage of the additionalInformation sub attribute in the consent access attribute is defined in the same way as for payment accounts. This applies e.g. for requesting account owner data, here the card owner.

BOI Remark:

In the Israeli market there is no need in explicit consent for requesting account/card owner data.

Examples for Establish Consent Requests

Remark: No specific requirements for responses, for examples for responses cp. Section 6.3.1 of [XS2A-IG].

Request for a dedicated consent on transactions and balances of a single card

BOI Remark:

This request refers to a single card although it doesn't contain cashAccountType.

```
POST https://api.testbank.com/v1/consents
Content-Type: application/json
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
PSU-IP-Address: 192.168.8.78
PSU-User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
Gecko/20100101 Firefox/54.0
Date: Sun, 06 Aug 2017 15:05:37 GMT

{
  "access": {
    "balances": [
      { "maskedPAN": "123456*****1234" }, /* balances of a single card
    ],
    "transactions": [
      { "maskedPAN": "123456*****1234" }, /* transactions of a single
card
    ],
  },
  "recurringIndicator": true,
  "validUntil": "2017-11-01",
  "frequencyPerDay": "100"
}
```

Request for access to all single cards behind a specific reconciliation account

```
POST https://api.testbank.com/v1/consents
Content-Type: application/json
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
PSU-IP-Address: 192.168.8.78
```


PSU-User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
Gecko/20100101 Firefox/54.0
Date: Sun, 06 Aug 2017 15:05:37 GMT

```
{
  "access": {
    "balances": [
      { "iban": "DE40100100103307118608" }, /* balances of a dedicated
payment account
      { "iban": "DE02100100109307118603",
        "cashAccountType": "CARD" /* balances of all cards behind this
reconciliation account, e.g. main card and partner card
      }
    ],
    "transactions": [
      { "iban": "DE02100100109307118603",
        "cashAccountType": "CARD" } /* transactions of all cards behind
this reconciliation account, e.g. main card and partner card
      ]
    ],
    "recurringIndicator": true,
    "validUntil": "2017-11-01",
    "frequencyPerDay": "100"
  }
}
```

BOI Remark:

The next example added by BOI.

Request for access to payment account and all single cards behind a specific reconciliation account.

POST <https://api.testbank.com/v1/consents>

Content-Type: application/json
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
PSU-IP-Address: 192.168.8.78
PSU-User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
Gecko/20100101 Firefox/54.0
Date: Sun, 06 Aug 2017 15:05:37 GMT

```
{
  "access": {
    "balances": [
      { "iban": "DE40100100103307118608" }, /* balances of a dedicated
payment account
```

```
{ "iban": "DE02100100109307118603",
  "cashAccountType": "CARD" /* balances of all cards behind
reconciliation account, e.g. main card and partner card
},
{ "iban": "DE02100100109307118603",
  "cashAccountType": "CACC" /* balances of a dedicated payment
account
}

],
"transactions": [
  { "iban": "DE02100100109307118603"
}, /* transactions of a dedicated payment account

  { "iban": "DE02100100109307118603",
    "cashAccountType": "CARD"
  } /* transactions of all cards behind this reconciliation
account, e.g. main card and partner card
]
},
"recurringIndicator": true,
"validUntil": "2017-11-01",
"frequencyPerDay": "100"
}
```

Request for a bank driven consent, restricted to the related credit cards

POST <https://api.testbank.com/v1/consents>

Content-Type application/json
X-Request-ID 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
PSU-IP-Address 192.168.8.78
PSU-User-Agent Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
Gecko/20100101 Firefox/54.0
Date Sun, 06 Aug 2017 15:05:37 GMT

```
{"access":
  {"balances": [],
   "transactions": [],
   "restrictedTo": ["CARD"]},
  "recurringIndicator": true,
  "validUntil": "2017-11-01",
  "frequencyPerDay": "100"
}
```

BOI Remark:

This example added by BOI.

Request for a bank driven consent for access to all kind of existing products.

POST <https://api.testbank.com/v1/consents>

Content-Type application/json
X-Request-ID 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
PSU-IP-Address 192.168.8.78
PSU-User-Agent Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
Gecko/20100101 Firefox/54.0
Date Sun, 06 Aug 2017 15:05:37 GMT

```
{ "access":  
  { "balances": [],  
    "transactions": [],  
    "recurringIndicator": true,  
    "validUntil": "2017-11-01",  
    "frequencyPerDay": "100"  
  }  
}
```

Request for a global consent, restricted to cash account types (ignoring cards)

POST <https://api.testbank.com/v1/consents>

Content-Type application/json
X-Request-ID 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
PSU-IP-Address 192.168.8.78
PSU-User-Agent Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
Gecko/20100101 Firefox/54.0
Date Sun, 06 Aug 2017 15:05:37 GMT

```
{ "access":  
  { "allPSD2": "allAccounts",  
    "restrictedTo": ["CACC"]  
  },  
  "recurringIndicator": true,  
  "validUntil": "2017-11-01",  
  "frequencyPerDay": "100"  
}
```

Remark: The latter example is relevant only in communities or for ASPSP which are offering the single card endpoint.

Card Specifics in Reading Consents

Additionally to _links element of type "account" or "cardAccount", the hyperlink section may also contain "card" links to request specific information on single cards.

Multicurrency cards

Some ASPSPs offer credit card products where transactions can be booked in several currencies, typically in local currency and in the related reconciliation currency of the card system (e.g. US Dollar), depending on the usage of the card (e.g. domestic transactions or inter-regional transactions).

In difference to the current account approach, this specification only supports to show the results on addressed multicurrency cards in an aggregated level, i.e. the card details will be associated with the "XXX" currency and balances and transactions will be provided aggregated on one card endpoint in all the related transaction currencies.

For this reason, consent submissions where card related Account Information Services are requested and where a currency is added to the card account reference will be rejected.

4.3 Additional Error Information

No specific addition error information is needed for this extended service.

4.4 Status Information

Status Information for the AIS within the Establish Consent Process

No specific status information needed for this extended service.

5 New Message types

New message types / endpoints are defined for this extended service:

5.1 Read Card List

Request

Call

GET /v1/cards

Reads a list of cards potentially with additional information, e.g. balance information. It is assumed that a consent of the PSU to this access is already given and stored on the ASPSP system. The addressed list of cards depends then on the stored consent addressed by consentId, respectively the OAuth2 access token.

Query Parameters

No specific query parameter.

Request Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.
PSU-IP-Address	String	Conditional	The forwarded IP Address header field consists of the corresponding HTTP request IP Address field between PSU and TPP. It shall be contained if and only if this request was actively initiated by the PSU.
Consent-ID	String	Mandatory	Identification of the corresponding consent as granted by the PSU.
Authorization	String	Conditional	Is contained only, if an OAuth2 based SCA was performed in the corresponding mandate transaction or if OAuth2 has been used in a pre-step.

Request Body

No request body.

Response

Response Code

HTTP Response Code equals 200.

Response Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.

Response Body

Attribute	Type	Condition	Description
cards	Array of Card Account Details	Mandatory	Descriptions of the accessible cards.

Remark: The same syntactical structure is used to transport card information as card account information. In difference to the card-accounts context, in some attributes properties of the dedicated card are provided instead of properties of the underlying reconciliation account. This applies for examples to the status attribute.

NOTE: If one of the card is a multicurrency card, then the account currency equals "XXX" as for current accounts.

Examples

BOI Remarks:

This example is not relevant because of debitAccounting.

```
{
  "cards": [
    {
      "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b99",

```

```
"maskedPan": "525412*****3241",
"currency": "EUR",
"name": "Main",
"product": "Basic Credit Card",
"debitAccounting": false,
"status": "enabled",
"creditLimit": { "currency": "EUR", "amount": "5000" },
"balances": [
  {
    "balanceAmount": { "currency": "EUR", "amount": "-1390.10" },
    "balanceType": "interimBooked"
  }, {
    "balanceAmount": { "currency": "EUR", "amount": "3609.90" },
    "balanceType": "interimAvailable",
    "creditLimitIncluded": true
  }
]
}, {
  "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b98",
  "maskedPan": "525412*****3242",
  "currency": "EUR",
  "name": "PartnerCard",
  "product": "Basic Credit Card",
  "debitAccounting": false,
  "status": "enabled",
  "creditLimit": { "currency": "EUR", "amount": "5000" },
  "balances": [
    {
      "balanceAmount": { "currency": "EUR", "amount": "-559.10" },
      "balanceType": "interimBooked"
    }, {
      "balanceAmount": { "currency": "EUR", "amount": "4440.90" },
      "balanceType": "interimAvailable",
      "creditLimitIncluded": true
    }
  ]
}
]
```

BOI Remarks:

This example was added by BOI.

```
{
  "cards": [
    {
      "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b99",
      "maskedPan": "525412*****3241",
      "currency": "EUR",
      "name": "Main",
      "product": "Basic Credit Card",
      "status": "enabled",
      "creditLimit": { "currency": "EUR", "amount": "5000" },
      "balances": [
        {
          "balanceType": "interimBooked",
          "balanceAmount": { "currency": "EUR", "amount": "1390.10" }
        }, {
          "balanceType": "interimAvailable",
          "creditLimitIncluded": true
          "balanceAmount": { "currency": "EUR", "amount": "3609.90" }
        }
      ]
    }, {
      "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b98",
      "maskedPan": "525412*****3242",
      "currency": "EUR",
      "name": "PartnerCard",
      "product": "Basic Credit Card",
      "status": "enabled",
      "creditLimit": { "currency": "EUR", "amount": "5000" },
      "balances": [
        {
          "balanceType": "interimBooked",
          "balanceAmount": { "currency": "EUR", "amount": "559.10" }
        }, {
          "balanceType": "interimAvailable",
          "creditLimitIncluded": true
          "balanceAmount": { "currency": "EUR", "amount": "4440.90" }
        }
      ]
    }
  ]
}
```


5.2 Read Card Details

Request

Call

GET /v1/cards/{card-id}

Reads details about a card. It is assumed that a consent of the PSU to this access is already given and stored on the ASPSP system. The addressed details of this account depends then on the stored consent addressed by consentId, respectively the OAuth2 access token.

Path Parameters

Attribute	Type	Description
card-id	String	This identification is denoting the addressed card. The card-id is retrieved by using a "Read Card List" call. The card-id is the "resourceId" attribute of the card structure. Its value is constant at least throughout the lifecycle of a given consent.

Query Parameters

No specific query parameter.

Request Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.
PSU-IP-Address	String	Conditional	The forwarded IP Address header field consists of the corresponding HTTP request IP Address field between PSU and TPP. It shall be contained if and only if this request was actively initiated by the PSU.
Consent-ID	String	Mandatory	Identification of the corresponding consent as granted by the PSU.
Authorization	String	Conditional	Is contained only, if an OAuth2 based SCA was performed in the corresponding mandate transaction or if OAuth2 has been used in a pre-step.

Request Body

No request body.

Response

Response Code

HTTP Response Code equals 200.

Response Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.

Response Body

Attribute	Type	Condition	Description
card	Card Account Details	Mandatory	Description of the addressed card.

Remark: The same syntactical structure is used to transport card information as card account information.

NOTE: If the card is a multicurrency card, then the account currency equals “XXX” as for current accounts.

Example 1 (standard card)

BOI Remarks:

This example is not relevant because of debitAccounting.

```
{
  "card":
  {
```

```
"resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b99",
"maskedPan": "525412*****3241",
"currency": "EUR",
"debitAccounting": false,
"name": "Main",
"product": "Basic Credit Card",
"status": "enabled",
"creditLimit": { "currency": "EUR", "amount": "5000" },
"balances": [
  {
    "balanceAmount": { "currency": "EUR", "amount": "-1390.10" },
    "balanceType": "interimBooked"
  }, {
    "balanceAmount": { "currency": "EUR", "amount": "3609.90" },
    "balanceType": "interimAvailable",
    "creditLimitIncluded": true
  }
],
"_links": {
  "self": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99"
  },
  "transactions": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99/transactions"
  }
}
}
```

BOI Remarks:

This example added by BOI.

```
{
  "card": {
    "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b99",
    "maskedPan": "525412*****3241",
    "currency": "EUR",
    "name": "Main",
    "product": "Basic Credit Card",
    "status": "enabled",
    "creditLimit": { "currency": "EUR", "amount": "5000" },
```

```
"balances": [  
  {  
    "balanceAmount": { "currency": "EUR", "amount": "1390.10" },  
    "balanceType": "interimBooked"  
  }, {  
    "balanceAmount": { "currency": "EUR", "amount": "3609.90" },  
    "balanceType": "interimAvailable",  
    "creditLimitIncluded": true  
  }  
],  
"_links": {  
  "self": {  
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99"  
  },  
  "transactions": {  
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99/transactions"  
  }  
}  
}
```

Example 2 (multicurrency card with balances)

BOI Remarks:

This example is not relevant because of debitAccounting.

```
{  
  "card": {  
    {  
      "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b99",  
      "maskedPan": "525412*****3241",  
      "currency": "XXX",  
      "name": "Main",  
      "product": "Basic Credit Card",  
      "debitAccounting": false,  
      "status": "enabled",  
      "creditLimit": { "currency": "EUR", "amount": "5000" },  
      "balances": [  
        {  
          "balanceAmount": { "currency": "EUR", "amount": "-1390.10" },  
          "balanceType": "interimBooked",  
        }, {  

```

```
    "balanceAmount": { "currency": "EUR", "amount": "3155.17" },
    "balanceType": "interimAvailable",
    "creditLimitIncluded": true
  },
  {
    "balanceAmount": { "currency": "USD", "amount": "-500.20" },
    "balanceType": "interimBooked"
    /*454,73 EUR equivalent with exchange rate 1,10 USD for 1 Euro
  },{
    "balanceAmount": { "currency": "USD", "amount": "3470.69" },
    "balanceType": "interimAvailable",
    "creditLimitIncluded": true
  } /* equivalent of 3.155.17 Euro
],
"_links": {
  "self": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99"
  },
  "transactions": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99/transactions"
  }
}
}
```

BOI Remarks:

This example added by BOI.

```
{
  "card": {
    {
      "resourceId": "4d9a81b3-a47d-4130-8765-a9c0ff861b99",
      "maskedPan": "525412*****3241",
      "currency": "XXX",
      "name": "Main",
      "product": "Basic Credit Card",
      "status": "enabled",
      "creditLimit": { "currency": "EUR", "amount": "5000" },
      "balances": [
        {
          "balanceAmount": { "currency": "EUR", "amount": "1390.10" },
          "balanceType": "interimBooked",
```

```
{
  {
    "balanceAmount": { "currency": "EUR", "amount": "3155.17" },
    "balanceType": "interimAvailable",
    "creditLimitIncluded": true
  },
  {
    "balanceAmount": { "currency": "USD", "amount": "500.20" },
    "balanceType": "interimBooked"
    /*454,73 EUR equivalent with exchange rate 1,10 USD for 1 Euro
  }, {
    "balanceAmount": { "currency": "USD", "amount": "3470.69" },
    "balanceType": "interimAvailable",
    "creditLimitIncluded": true
  } /* equivalent of 3.155.17 Euro
],
"_links": {
  "self": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99"
  },
  "transactions": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99/transactions"
  }
}
}
```

5.3 Read Card Balances

Request

Call

GET /v1/cards/{card-id}/balances

Reads balance data from a given card addressed by "card-id". Please note, that the current credit line of a given card might be tighter than what a response to this request will suggest due to general credit limits on the card account and transactions by other cards to the same card account.

Path Parameters

Attribute	Type	Description
-----------	------	-------------

card-id	String	This identification is denoting the addressed card. The card-id is retrieved by using a "Read Card List" call. The card-id is the "resourceId" attribute of the card structure. Its value is constant at least throughout the lifecycle of a given consent.
---------	--------	---

Query Parameters

Attribute	Type	Condition	Description
dateFrom	ISODate	Optional BOI Remark: Conditional	<p>Requests in addition to the balances of the current accounting period all booked balances at the end of previous accounting periods (e.g. monthly periods) from the provided date on if still retrievable under the given consent.</p> <p>Note: The accounting period is the invoicing period of the related card.</p> <p>This parameter is ignored by the ASPSP if it is not supported.</p> <p>A TPP may not include both parameters "dateFrom" and "valueDateFrom" in one request.</p> <p>BOI Remark:</p> <p>The parameter "dateFrom" may only be used, if it is supported by the ASPSP. The ASPSP must support at least one of the query parameters "dateFrom" and "valueDateFrom".</p> <p>This parameter is relevant only for differed debit card or credit card.</p> <p>If this parameter is empty, the TPP will get the balances for the last cycle (closing booked) and the balances for the current cycle (interim booked).</p> <p>The earliest date can be at least 12 month prior to "now".</p>

Attribute	Type	Condition	Description
			In case of exception from the minimum value the response will be only for the minimum period.
valueDateFrom	ISODate	Optional BOI Remark: Conditional	<p>Requests in addition to the balances of the current accounting period all balances at the end of previous accounting periods (e.g. monthly periods) with payment due date starting from the provided date on if still retrievable under the given consent.</p> <p>A TPP may not include both parameters "dateFrom" and "valueDateFrom" in one request.</p> <p>Note: The accounting period is the invoicing period of the related card.</p> <p>This parameter is ignored by the ASPSP if it is not supported.</p> <p>BOI Remark:</p> <p>The parameter "valueDateFrom" may only be used, if it is supported by the ASPSP. The ASPSP must support at least one of the query parameters "dateFrom" and "valueDateFrom".</p> <p>If this parameter is empty, the TPP will get the balances for the last cycle (closing booked) and the balances for the current cycle (interim booked).</p> <p>The earliest date can be at least 12 month prior to "now".</p> <p>In case of exception from the minimum value the response will be only for the minimum period.</p>

Request Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.
PSU-IP-Address	String	Conditional	The forwarded IP Address header field consists of the corresponding HTTP request IP Address field between PSU and TPP. It shall be contained if and only if this request was actively initiated by the PSU.
Consent-ID	String	Mandatory	Identification of the corresponding consent as granted by the PSU.
Authorization	String	Conditional	Is contained only, if an OAuth2 based SCA was performed in the corresponding mandate transaction or if OAuth2 has been used in a pre-step.

Request Body

No request body.

Response

Response Code

HTTP Response Code equals 200.

Response Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.

Response Body

Attribute	Type	Condition	Description
card	Account Reference	Optional BOI Remark: Mandatory	Identifier of the addressed card. Remark for Future: Might be mandated in a later version.
debitAccounting	Boolean	Optional BOI Remark: Not supported	If true, the amounts of debits on the reports are quoted positive with the related consequence for balances. If false, the amount of debits on the reports are quoted negative.
balances	Array of Balance	Mandatory	

Examples

Example on current balance only

Request for a request without PSU involvement

GET <https://api.testbank.com/v1/cards/12345678912-ef56/balances>

Accept: application/json
 X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7756
 PSU-User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0)
 Gecko/20100101 Firefox/54.0
 Date: Sun, 20 Sep 2020 15:05:37 GMT

Response

HTTP/1.x 200 Ok

X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7756

Content-Type: application/json

Date: Sun, 20 Sep 2020 15:05:38 GMT

BOI Remarks:

This example is not relevant because of debitAccounting

```
{
  "card": {"maskedPan": "525412*****3241"},
  "debitAccounting": false,
  "balances": [
    {
      "balanceAmount": { "currency": "EUR", "amount": "5654.22" },
      "balanceType": "interimAvailable",
      "creditLimitIncluded": true
    }, {
      "balanceAmount": { "currency": "EUR", "amount": "-4355.78" },
      "balanceType": "interimBooked"
    }
  ]
}
```

BOI Remarks:

This example was added by BOI.

```
{
  "card": {"maskedPan": "525412*****3241"},
  "balances": [
    {
      "balanceAmount": { "currency": "EUR", "amount": "5654.22" },
      "balanceType": "interimAvailable",
      "creditLimitIncluded": true
    }, {
      "balanceAmount": { "currency": "EUR", "amount": "4355.78" },
      "balanceType": "interimBooked"
    }
  ]
}
```

Example on booked balances of the past requested in addition

Request for a request without PSU involvement

GET <https://api.testbank.com/v1/cards/12345678912-ef56/balances?dateFrom=2020-06-01>

Accept: application/json
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7757
PSU-User-Agent: Mozilla/5.0 (Windows NT 10.0; WOW64; rv:54.0) Gecko/20100101 Firefox/54.0
Date: Sun, 20 Sep 2020 15:05:39 GMT

Response body

HTTP/1.x 200 Ok
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7757
Content-Type: application/json
Date: Sun, 20 Sep 2020 15:05:40 GMT

BOI Remarks:

This example is not relevant because of debitAccounting.

```
{
  "card": {"maskedPan": "525412*****3241"},
  "debitAccounting": false,
  "balances": [
    {
      "balanceAmount": { "currency": "EUR", "amount": "5654.22" },
      "balanceType": "interimAvailable",
      "creditLimitIncluded": true,
    }, {
      "balanceAmount": { "currency": "EUR", "amount": "-4355.78" },
      "balanceType": "interimBooked"
    }, {
      "balanceAmount": { "currency": "EUR", "amount": "-2255.45" },
      "balanceType": "closingBooked",
      "referenceDate": "2020-06-30"
    }, {
      "balanceAmount": { "currency": "EUR", "amount": "-1234.56" },
      "balanceType": "closingBooked",
      "referenceDate": "2020-07-31"
    }
  ]
}
```

```
    }, {  
      "balanceAmount": { "currency": "EUR", "amount": "-234.01" },  
      "balanceType": "closingBooked",  
      "referenceDate": "2020-08-31"  
    }  
  ]  
}
```

BOI Remarks:

This example was added by BOI.

```
{  
  "card": {"maskedPan": "525412*****3241"},  
  "balances": [  
    {  
      "balanceAmount": { "currency": "EUR", "amount": "5654.22" },  
      "balanceType": "interimAvailable",  
      "creditLimitIncluded": true,  
    }, {  
      "balanceAmount": { "currency": "EUR", "amount": "4355.78" },  
      "balanceType": "interimBooked"  
    }, {  
      "balanceAmount": { "currency": "EUR", "amount": "2255.45" },  
      "balanceType": "closingBooked",  
      "referenceDate": "2020-06-30"  
    }, {  
      "balanceAmount": { "currency": "EUR", "amount": "1234.56" },  
      "balanceType": "closingBooked",  
      "referenceDate": "2020-07-31"  
    }, {  
      "balanceAmount": { "currency": "EUR", "amount": "234.01" },  
      "balanceType": "closingBooked",  
      "referenceDate": "2020-08-31"  
    }  
  ]  
}
```

5.4 Read Card Transaction List

Request

Call

GET /v1/cards/{card-id}/transactions {query-parameters}

Reads account data from a given card addressed by "card-id".

Remark: This card-id can be a tokenised identification due to data protection reason since the path information might be logged on intermediary servers within the ASPSP sphere. This card-id then can be retrieved by the "GET Card List" call, cp. Section 5.1.

Note: The ASPSP might use standard compression methods on application level for the response message as indicated in the content encoding header.

Remark: Please note that the PATH might be already given in detail by the response of the "Read Card List" call within the _links subfield.

Path Parameters

Attribute	Type	Description
card-id	String	This identification is denoting the addressed card. The card-id is retrieved by using a "Read Card List" call. The card-id is the "resourceId" attribute of the card structure. Its value is constant at least throughout the lifecycle of a given consent.

Query Parameters

Attribute	Type	Condition	Description
dateFrom	ISODate	Conditional if supported by API provider	<p>Starting date (inclusive the date dateFrom) of the transaction list with regards to element "bookingDate".</p> <p>If queryParameter "deltaList" is included in the request with value "true", neither parameter "dateFrom" nor parameter "valueDateFrom" may be included. Otherwise, exactly one of the parameters "dateFrom" and "valueDateFrom" must be included.</p> <p>The parameter "dateFrom" may only be used, if it is supported by the ASPSP. The ASPSP must support at least one of the query parameters "dateFrom" and "valueDateFrom".</p>

			BOI remarks: The earliest date can be at least 12 month prior to "now". In case of exception from the minimum value the response will be only for the minimum period.
dateTo	ISODate	Optional if supported by API provider	End date (inclusive the data dateTo) of the transaction list with regards to element "bookingDate", default is "now" if not given. "dateTo" must not be included in the request, if parameter "dateFrom" is not included. The parameter "dateTo" may only be used, if it is supported by the ASPSP. The ASPSP must support if it supports query parameter "dateFrom".
valueDateFrom	ISODate	Conditional if supported by API provider	Starting date (inclusive the date dateFrom) of the transaction list with regards to element "valueDate", mandated if no delta access is required. If queryParameter "deltaList" is included in the request with value "true", neither parameter "dateFrom" nor parameter "valueDateFrom" may be included. Otherwise, exactly one of the parameters "dateFrom" and "valueDateFrom" must be included. The parameter "valueDateFrom" may only be used, if it is supported by the ASPSP. The ASPSP must support at least one of the query parameters "dateFrom" and "valueDateFrom". BOI Remark: The earliest date can be at least 12 month prior to "now".

			In case of exception from the minimum value the response will be only for the minimum period.
valueDateTo	ISODate	Optional if supported by API provider	<p>End date (inclusive the data dateTo) of the transaction list with regards to element "valueDate", default is "now" if not given.</p> <p>"valueDateTo" must not be included in the request, if parameter "valueDateFrom" is not included.</p> <p>The parameter "valueDateTo" may only be used, if it is supported by the ASPSP. The ASPSP must support if it supports query parameter "valueDateFrom".</p>
bookingStatus	String	Mandatory	<p>Permitted codes are "booked", "pending" and "both"</p> <p>"booked" shall be supported by the ASPSP.</p> <p>To support the "pending" and "both" feature is optional for the ASPSP, Error code if not supported in the online banking frontend</p>
deltaList	Boolean	Optional if supported by API provider	<p>This data attribute is indicating that the AISP is in favour to get all transactions after the last report access for this PSU on the addressed account.</p> <p>This delta indicator might be rejected by the ASPSP if this function is not supported.</p>

Request Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.
PSU-IP-Address	String	Conditional	The forwarded IP Address header field consists of the corresponding HTTP request IP Address field between PSU and TPP. It shall be contained if and only if this request was actively initiated by the PSU.
Consent-ID	String	Mandatory	Identification of the consent for this access as granted by the PSU.
Authorization	String	Conditional	Is contained only, if an OAuth2 based authentication was performed in a pre-step or an OAuth2 based SCA was performed in the related consent authorisation.

Request Body

No request body.

Response

Response Code

HTTP Response Code equals 200.

Response Header

Attribute	Type	Condition	Description
X-Request-ID	UUID	Mandatory	ID of the request, unique to the call, as determined by the initiating party.

Response Body

Attribute	Type	Condition	Description
Card	Account Reference	Optional	Identifier of the addressed card.

Attribute	Type	Condition	Description
		BOI Remark: Mandatory	Remark for Future: Might be mandated in a later version.
debitAccounting	Boolean	Optional BOI Remarks: Not supported	If true, the amounts of debits on the reports are quoted positive with the related consequence for balances. If false, the amount of debits on the reports are quoted negative.
cardTransactions	Card Account Report	Optional BOI Remark: Mandatory	JSON based account report including only transactions for the specifically requested card. For more details, see [XS2A-IG].
Balances	Array of Balance	Optional	A list of balances regarding this card, which might be restricted to the current balance.
_links	Links	Optional	A list of hyperlinks to be recognised by the TPP. Type of links admitted in this response: "download": a link to a resource, where the transaction report might be downloaded from in case where transaction reports have a huge size. BOI remarks: "download" is not supported.

Example

```
GET https://api.testbank.com/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99/transactions?dateFrom=2017-10-01&dateTo=2017-10-30
Accept: application/json
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7721
```

Response (Example 1)

Response in JSON format for an access on a regular account

HTTP/1.x 200 Ok
X-Request-ID: 99391c7e-ad88-49ec-a2ad-99ddcb1f7721
Date: Sun, 06 Aug 2017 15:05:47 GMT
Content-Type: application/json

BOI remarks:

This example is not relevant because of debitAccounting.

```
{
  "card": {
    "maskedPan": "525412*****3241"
  },
  "debitAccounting": false,
  "cardTransactions": {
    "booked": [
      {
        "cardTransactionId": "201710020036959",
        "transactionAmount": { "currency": "EUR", "amount": "-256.67" },
        "grandTotalAmount": { "currency": "EUR", "amount": "-2566.70" },
        "transactionDate": "2017-10-25",
        "bookingDate": "2017-10-26",
        "valueDate": "2017-11-01",
        "cardAcceptorAddress": {
          "city": "STOCKHOLM",
          "country": "SE"
        },
        "proprietaryBankTransactionCode": "INSTALMENT",
        "invoiced": false,
        "transactionDetails": "WIFIMARKET.SE"
      }, {
        "cardTransactionId": "201710020091863",
        "transactionAmount": { "currency": "EUR", "amount": "-10.72" },
        "transactionDate": "2017-10-25",
        "bookingDate": "2017-10-26",
        "valueDate": "2017-11-01",
        "originalAmount": { "currency": "SEK", "amount": "-99" },
        "cardAcceptorAddress": {
          "city": "STOCKHOLM",
          "country": "SE"
        }
      }
    ]
  }
}
```

```
    },
    "proprietaryBankTransactionCode" : "PURCHASE",
    "invoiced": false,
    "transactionDetails": "ICA SUPERMARKET SKOGHA"
  }
],
"pending": [ ],
"_links": {
  "card": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99"
  }
}
}
```

BOI remarks:

This example added by BOI.

```
{
  "card": {
    "maskedPan": "525412*****3241"
  },
  "cardTransactions": {
    "booked": [
      {
        "cardTransactionId": "201710020036959",
        "transactionAmount": { "currency": "EUR", "amount": "256.67" },
        "grandTotalAmount": { "currency": "EUR", "amount": "2566.70" },
        "transactionDate": "2017-10-25",
        "bookingDate": "2017-10-26",
        "valueDate": "2017-11-01",
        "cardAcceptorAddress": {
          "city" : "STOCKHOLM",
          "country" : "SE"
        },
        "proprietaryBankTransactionCode" : "INSTALMENT",
        "invoiced": false,
        "transactionDetails": "WIFIMARKET.SE"
      }, {
        "cardTransactionId": "201710020091863",
        "transactionAmount": { "currency": "EUR", "amount": "10.72" },
        "transactionDate": "2017-10-25",
        "bookingDate": "2017-10-26",
        "valueDate": "2017-11-01",
```

```
"originalAmount": { "currency": "SEK", "amount": "99" },
"cardAcceptorAddress": {
  "city" : "STOCKHOLM",
  "country" : "SE"
},
  "proprietaryBankTransactionCode" : "PURCHASE",
"invoiced": false,
"transactionDetails": "ICA SUPERMARKET SKOGHA"
}
],
"pending": [ ],
"_links": {
  "card": {
    "href": "/v1/cards/4d9a81b3-a47d-4130-8765-a9c0ff861b99"
  }
}
}
}
```

6 Extension of Complex Data Types

To support the more detailed selection of consents existing Data types must be extended. This chapter describes the new data type definitions. Changes to the existing definition are highlighted.

6.1 Links

In addition to the already defined links ([XS2A-IG], cp. 14.6), the following link shall be supported:

Attribute	Type	Condition	Description
card	href Type	Optional	A link to the resource providing the details of one card.
cardTransactions	href Type	Optional	A link to the resource providing the transaction history of a dedicated card or a card account.
cardAccount	href Type	Optional	A link to the resource providing the details of one card account.

6.2 Account Access

Attribute	Type	Condition	Description
accounts	Array of Account Reference	Optional	Is asking for detailed account information. If the array is empty, the TPP is asking for an accessible account list. This may be restricted in a PSU/ASPSP authorization dialogue. If the array is empty, also the arrays for balances or transactions shall be empty, if used.
balances	Array of Account Reference	Optional	Is asking for balances of the addressed accounts.

Attribute	Type	Condition	Description
			If the array is empty, the TPP is asking for the balances of all accessible account lists. This may be restricted in a PSU/ASPSP authorization dialogue. If the array is empty, also the arrays for accounts or transactions shall be empty, if used.
transactions	Array of Account Reference	Optional	Is asking for transactions of the addressed accounts. If the array is empty, the TPP is asking for the transactions of all accessible account lists. This may be restricted in a PSU/ASPSP authorization dialogue. If the array is empty, also the arrays for accounts or balances shall be empty, if used.
additional Information	Additional Information Access	Optional if supported by API provider	Is asking for additional information as added within this structured object. The usage of this data element requires at least one of the entries "accounts", "transactions" or "balances" also to be contained in the object. If detailed accounts are referenced, it is required in addition that any account addressed within the additionalInformation attribute is also addressed by at least one of the attributes "accounts", "transactions" or "balances".
availableAccounts	String	Optional if supported by API provider	Only the value "allAccounts" is admitted.

Attribute	Type	Condition	Description
availableAccounts WithBalance	String	Optional, if supported by API provider	Only the value "allAccounts" is admitted.

Attribute	Type	Condition	Description
allPsd2	String	Optional if supported by API provider	Only the value "allAccounts" is admitted.
restrictedTo	Array of Cash Account Type	Conditional if supported by API provider.	<p>If the TPP requests access to accounts via availableAccounts (List of available accounts), global or bank driven consents, the TPP may include this element to restrict access to the referred account types.</p> <p>Absence of the element is interpreted as "no restriction" (therefore access to accounts of all types is requested). The element may only occur, if each of the elements</p> <ul style="list-style-type: none"> accounts balances transactions <p>is either not present or contains an empty array.</p> <p>Remark for Future: In a future version of the XS2A-Interface the data model for consents will be changed and therefore this element will most likely become obsolete.</p> <p>BOI Remark:</p> <p>This attribute have to be supported by the API provider.</p> <p>In detailed consent model this field have to be empty or not presented.</p>

6.3 Account Reference

This type is containing any account identification which can be used on payload-level to address specific accounts. The ASPSP will document which account reference type it will support. Exactly one of the attributes defined as "conditional" shall be used.

Remark: The currency of the account is needed, where the currency is an account characteristic identifying certain sub-accounts under one external identifier like an IBAN. These sub-accounts are separated accounts from a legal point of view and have separated balances, transactions etc.

Attribute	Type	Condition	Description
Iban	IBAN	Conditional	
Bban	BBAN	Conditional	This data elements is used for payment accounts which have no IBAN.
Pan	Max35Text	Conditional BOI remarks: Not supported	Primary Account Number (PAN) of a card, can be tokenised by the ASPSP due to PCI DSS requirements. Note: If this element is used in a card account context, it might refer to a whole card account (covering more than one card), represented by its leading card's PAN. In the context of a (single) card, this PAN will always represent (only) the card(s) with this PAN
maskedPan	Max35Text	Conditional BOI remarks: <u>For credit card company</u> - Mandatory	Primary Account Number (PAN) of a card in a masked form. BOI remarks: <u>For credit card company:</u> the maskedpan should always be specified for payment cards.

Attribute	Type	Condition	Description
Msisdn	Max35Text	Conditional	An alias to access a payment account via a registered mobile phone number.
Currency	Currency Code	Optional	ISO 4217 Alpha 3 currency code BOI Remarks: In post consent for cards, a specific currency cannot be specified.
cashAccountType	Cash Account Type	Optional, if supported by API provider. BOI remarks: Conditional	ExternalCashAccountType1Code from ISO 20022 The API provider may restrict the accepted values further (e.g. only "CARD" and "CACC" may be supported). The TPP includes this element, if the account reference may identify several accounts of different types, but the TPP only requests access to a specific type (e.g. card accounts). BOI Remark: Savings: SVGS for saving accounts Loan: "LOAN" for loan accounts If the cashAccountType is not present, it indicates the cashAccountType <ul style="list-style-type: none"> "Card Account" in case of the account identification being provided as a maskedPan "Current Account" (CACC) otherwise.

Attribute	Type	Condition	Description
			In case the TPP requests access for several types with same identifiers, the TPP will send the same identifier multiple times for each cashAccountType.

6.4 Card Account Details

Attribute	Type	Condition	Description
resourceId	String	Conditional BOI Remarks: Conditional depends on the API service and not on the online channels.	This is the data element to be used in the path when retrieving data from a dedicated account. This shall be filled, if addressable resource are created by the ASPSP on the /card-accounts endpoint.
maskedPan	Max35Text	Mandatory	Primary Account Number (PAN) of the main card in masked form. In the context of a response to a "/card-accounts" endpoint, this is the PAN of the main card; in the context of a "/cards" endpoint, this identifies the specific card for that the information is presented. This data element can be used in the body of the Consent Request Message for retrieving account access consent from this card..
currency	Currency Code	Mandatory	Account currency BOI Remarks:

Attribute	Type	Condition	Description
			Card/ Account currency
ownerName	Max140Text	Optional BOI Remarks: Conditional	<p>Name of the legal account owner. If there is more than one owner, then e.g. two names might be noted here.</p> <p>For a corporate account, the corporate name is used for this attribute.</p> <p>Even if supported by the ASPSP, the provision of this field might depend on the fact whether an explicit consent to this specific additional account information has been given by the PSU.</p> <p>BOI Remarks:</p> <p>Name of the legal account / card owner</p> <p>For the Israeli market there is no need in explicit consent to this specific additional account information.</p>
name	Max70Text	Optional BOI Remarks: Conditional	<p>Name of the card / card account, as assigned by the ASPSP, in agreement with the account owner in order to provide an additional means of identification of the card/ card account.</p>
displayName	Max70Text	Optional BOI Remarks: Conditional	<p>Name of the card / card account as defined by the PSU within online channels.</p>
product	Max35Text	Optional BOI Remarks: Conditional	<p>Product Name of the ASPSP for this accountcard / card account, proprietary definition.</p>

Attribute	Type	Condition	Description
debitAccounting	Boolean	Optional BOI Remarks: Not supported	If true, the amounts of debits on the reports are quoted positive with the related consequence for balances. If false, the amount of debits on the reports are quoted negative.
status	String	Optional BOI Remarks: Conditional	Account status. The value is one of the following: <ul style="list-style-type: none"> "enabled": account / card is available "deleted": account / card is terminated "blocked": account / card is blocked e.g. for legal reasons If this field is not used, than the account / card is available in the sense of this specification. BOI Remark: Account / card status. "blocked" e.g. for legal reasons or suspended.
usage	Max140 Text	Optional BOI Remarks: Mandatory	Specifies the usage of the account/ card <ul style="list-style-type: none"> - PRIV: private personal account/ card - ORGA: professional account/ card
details	Max1000 Text	Optional BOI Remarks: Conditional	Specifications that might be provided by the ASPSP <ul style="list-style-type: none"> - characteristics of the account - characteristics of the relevant card BOI remarks: <u>For example:</u>

Attribute	Type	Condition	Description
			- Characteristic of the creditLimit level - Characteristic of the monthly billing date.
creditLimit	Amount	Optional BOI Remarks: Conditional	<p>In the context of a response to a "card-accounts" endpoint, this element defines the credit limit of the PSU aggregated for all cards related to this card account in total.</p> <p>In the context of a response to a "cards" endpoint, it is up to the ASPSP whether this element contains an aggregated limit for all associated cards or a specific limit for the requested card. This decision must be contained in the documentation of the ASPSP.</p> <p>BOI remarks:</p> <p>The ASPSP will report the credit limit level (Aggregated or specific per card) in the "details" attribute.</p>
balances	Array of Balances	Optional	<p>The specific card account balances associated to this card / card account.</p> <p>In the context of a response to a "cards" endpoint, each balance that indicates that credit limit is included must respect all applicable credit limits relevant for this card (cp. Section 6.6)</p>
_links	Links	Optional	<p>Links to the card / cardAccount, which can be directly used for retrieving account information from this dedicated account.</p> <p>Links to "balances" and/or "cardTransactions"</p> <p>These links are only supported, when the corresponding consent has been already granted.</p>

6.5 Balance Type

The following balance types are excluding credit limits unless the creditLimitIncluded element is present and equals true in the corresponding balance element. Changes for the balances for dedicated cards are highlighted.

Remark: This definition is following ISO20022 logic for defining balance types.

BOI remarks:

The table below lists the balances types for each kind of card for the Israeli market.

Attribute	Card account	Cards endpoint		
		differed debit/ credit card	Prepaid card	Debit card
closingBooked	היתרה בפועל בחשבון הכרטיס	mandatory הסכום שחויב במחזור האחרון (רלוונטי לתאריכים קודמים). בבקשת יתרה ללא תאריך ינתן רק החיוב האחרון. ככל שהפינטק יוסיף בבקשה את התאריכים המבוקשים	optional היתרה הנוכחית בכרטיס	N.R אין משמעות ואין צורך לדווח
interimBooked	העסקאות שנצברו בכלל הכרטיסים (בחשבון הכרטיס) וטרם חויבו	mandatory החייבים שנצברו ממועד החיוב האחרון ועד למועד החיוב הבא בכרטיס הספציפי	conditional ככל שיש תנועות שטרם חויבו (להבנתנו אין)	N.R לא רלוונטי
interimAvailable	המסגרת הפנויה בחשבון הכרטיס	mandatory OPEN TO BUY המסגרת הפתוחה לניצול בכרטיס הספציפי או באוסף כרטיסים	mandatory היתרה הנוכחית בכרטיס	N.R לא רלוונטי
הערות	השירות הינו אופציונלי. אם בנק מממש את השירות הזה הציפייה היא שיפעל לתת את שלוש היתרות הנל		התנועות רלוונטיות	היתרה לא רלוונטית כי היא משתקפת בעו"ש עצמו. יש לדווח את התנועות

Type	Description
closingBooked	<p>Balance of the account at the end of the pre-agreed account reporting period. It is the sum of the opening booked balance at the beginning of the period and all entries booked to the account during the pre-agreed account reporting period.</p> <p>For card-accounts, this is composed of</p> <ul style="list-style-type: none"> invoiced, but not yet paid entries <p>For cards the account entries are booking entries from the card processor or invoices paid by the PSU.</p> <p>BOI remark for the future:</p> <p>For cards, this is composed of entries at the closing time of the accounting period, which have to be invoiced. i.e. invoiced and paid entries at the closing time of the accounting period</p>
expected	<p>Balance composed of booked entries and pending items known at the time of calculation, which projects the end of day balance if everything is booked on the account and no other entry is posted.</p> <p>For card accounts, this is composed of</p> <ul style="list-style-type: none"> invoiced, but not yet paid entries, not yet invoiced but already booked entries and pending items (not yet booked)
openingBooked	<p>Book balance of the account at the beginning of the account reporting period. It always equals the closing book balance from the previous report.</p>
interimAvailable	<p>Available balance calculated in the course of the account 'servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.</p> <p>For card-accounts, this is composed of</p> <ul style="list-style-type: none"> invoiced, but not yet paid entries, not yet invoiced but already booked entries

Type	Description
	<p>For cards, this is composed of</p> <ul style="list-style-type: none"> invoiced, but not yet paid entries not yet invoiced but already booked entries pending items (not yet booked)
interimBooked	<p>Balance calculated in the course of the account servicer's business day, at the time specified, and subject to further changes during the business day. The interim balance is calculated on the basis of booked credit and debit items during the calculation time/period specified.</p> <p>Remark: For cards, this time period consists of the accounting period of the related card, e.g. the interim booked items during a month.</p> <p>BOI remark for the future:</p> <p>For cards, this time period consists of the accounting period of the related card, e.g. the interim booked items during a month. i.e. invoiced, but not yet paid entries</p>
forwardAvailable	Forward available balance of money that is at the disposal of the account owner on the date specified.
nonInvoiced	Only for card accounts, to be defined yet.

6.6 Example: calculation of balance types

Balance type interimAvailable

The following table give two examples on how the "interimAvailable" is calculated in case of "creditLimitIncluded" (true or false) in a setting, where

- Card 1 is associated with a partner card (Card 2),
- both cards have an individual limit and
- there is an additional "aggregated limit" applicable for both of them.

Please note that "debitAccounting" flag in all these cases equals `false`.

Note: The "interimAvailable" balance where "creditLimitIncluded" equals true is the open to buy limit of the relevant card, while the "interimBooked" limit is referring to bookings between the card scheme and the bank, and the bank and the PSU respectively during the accounting period.

Aggregated Credit Limit	Credit Limit Card 1	Credit Limit Card 2	Spending s Card 1	Spending s Card 2	Interim Available Card 1 (Credit Limit included)	Interim Booked Card 1 (Credit Limit not included)
700	500	500	100	500	100	-100
						BOI Remarks: 100
700	500	500	400	50	100	-400
						BOI Remarks: 400

Balance Types closingBooked and interimBooked for credit cards

The "closingBooked" balance is the balance of the card at the end of an accounting period, i.e. at the end of the related invoicing period for credit cards. In case of the "debitAccounting" flag equals *false*, the example would be e.g.:

- closingBooked Balance at 31st July (end of invoicing period): -3456,12 Euro
- interimBooked Balance at 1st August (invoicing period not yet paid, new card transaction of 20 Euro): -3476,12 Euro
- interimBooked Balance at 2nd August (invoice had been paid): -20 Euro.

BOI Remarks:

For the Israeli market debitAccounting is not supported:

The "closingBooked" balance is the balance of the card at the end of an accounting period, i.e. at the end of the related invoicing period for credit cards. the example would be e.g.:

- closingBooked Balance at 31st July (end of invoicing period): 3456,12 Euro
- interimBooked Balance at 1st August (invoicing period not yet paid, new card transaction of 20 Euro): 3476,12 Euro
- interimBooked Balance at 2nd August (invoice had been paid): 20 Euro.

Balance Types closingBooked and interimAvailable for prepaid cards

The "closingBooked" balance is the balance of the card at the end of an accounting period, i.e. at the end of the day for prepaid cards. In case of the "debitAccounting" flag equals *false*, the example would be e.g.:

- closingBooked Balance at 14 June 123,12 Euro
- interimAvailable Balance at 14 June, 1 pm. 103,12 Euro (20 Euro was used for shopping)
- closingBooked Balance at 15 June 103,12 Euro

7 References

- [XS2A-OR] NextGenPSD2 XS2A Framework, Operational Rules, The Berlin Group Joint Initiative on a PSD2 Compliant XS2A Interface, version 1.3, published 21 December 2018
- [XS2A-IG] NextGenPSD2 XS2A Framework, Implementation Guidelines, The Berlin Group Joint Initiative on a PSD2 Compliant XS2A Interface, version 1.3.9, published 29 March 2021 .
- [XSA-IG-ERR]NextGenPSD2 XS2A Framework, Errata Version 1.3.9, 30 June 2021
- [XS2A-DP] NextGenPSD2 XS2A Framework, Domestic Payment Definitions, The Berlin Group Joint Initiative on a PSD2 Compliant XS2A Interface, current version
- [EBA-RTS] Commission Delegated Regulation (EU) 2018/389 of 27 November 2017 supplementing Directive 2015/2366 of the European Parliament and of the Council with regard to Regulatory Technical Standards for Strong Customer Authentication and Common and Secure Open Standards of Communication, C(2017) 7782 final, published 13 March 2018

- [eIDAS] Regulation (EU) No 910/2014 of the European Parliament and of the Council on Electronic Identification and Trust Services for Electronic Transactions in the Internal Market, 23 July 2014, published 28 August 2014
- [PSD2] Directive (EU) 2015/2366 of the European Parliament and of the Council on payment services in the internal market, published 23 December 2015

